



MAZAKA
HEAVY INDUSTRY

SOLAR PILE DRIVER
MW600-TX5



MAZAKA
GROUP

MW600-TX5



TECHNICAL SPECIFICATIONS

ENGINE

Make	YANMAR
Power	35.5 kW / Stage 5
Rated Speed	2200 rpm
Fuel Tank	60 l
DPF Filter	Yes

HAMMER

Power	1200 Joule
Operating Pressure	120 bar
Hammer Blow Rate	570-1180



HYDRAULIC SYSTEM

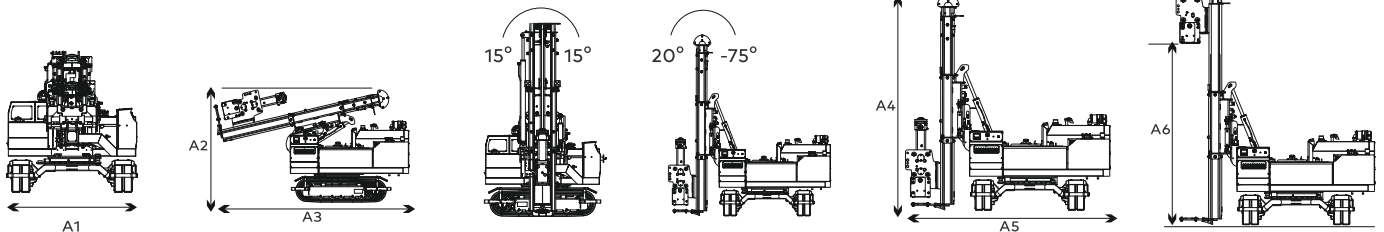
Oil Flow Rate	50-100 l
Oil Pressure	180 bar
Oil Tank	150 l

DIMENSION





Transport Widht	A1	1700 mm
Transport Height	A2	2200 mm
Transport Lenght	A3	3850 mm
Widht of Machine	A1	1980 mm
Height of Machine	A4	3200 mm
Lenght of Machine	A5	3150 mm
Mast Height	A6	3500 mm
Weight		4000 kg
Boom Stroke		480 mm
Rotation		90°
Tilt		15°
Angle of mast forward		20°
Angle of mast backward		-75°

TRAVEL




Low / High Speed	2.2 / 4 km/h
Gradeability 	20%
Sidewalk 	10°
Crawler Type	Rubber





Mazaka Factory

 Mimarşinan OSB Mah. 7. Cadde No:24
 Melikgazi/Kayseri/TÜRKİYE
 +90 352 311 44 18  +90 533 204 41 70
 info@mazaka.eu

Mazaka USA LLC

 2611 Andjon Drive
 Dallas, TX 75220
 +1 203 904 8074
 america@mazaka.eu

Mazaka Europe Office

 Industriestrasse 12-16, 42929
 Wermelskirchen Germany
 +90 553 468 13 24
 europe@mazaka.eu

